


PRODUCT FEATURES

- Reliant™ 4th Generation adaptive feedback cancellation technology
- 12 bands of Gain Adjustment
- 12 band Layered Noise Reduction
- 8 channel WDRC and MPO adjustment
- Air-Tap volume control and program change
- Data logging
- Easily serviceable D-ring retention technology
- Up to 4 Independently Programmable Memories
- Memory Change / Low Battery Indicators
- Optional silicone sleeve available for feedback reduction and increased fitting range




Available Colors: Black and Sand

RECOMMENDED FITTING RANGE

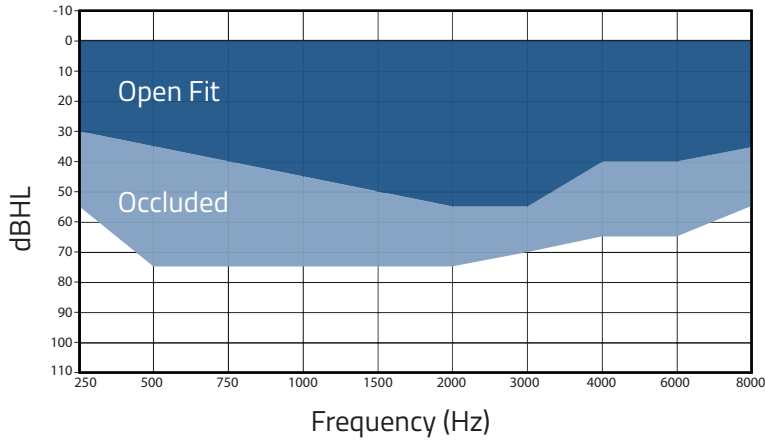

RESPONSE CURVE

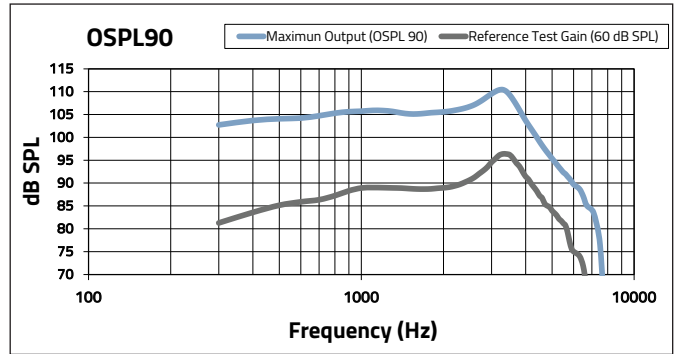

SPECIFICATION DATA

IEC 60118-7/ ANSI S3.22-2003 (2cc)	HA1 Coupler
Peak OSPL90 (dB SPL)	110
HFA OSPL90 (dB SPL)	105
Typical Peak Gain (dB)	37
HFA FOG (dB)	27
HFA Ref. Test Gain (dB)	27
Frequency Range: f1-f2	200-7100
THD @ 500 Hz (%)	1.7
@ 800 Hz (%)	1.4
@ 1600 Hz (%)	1.7
Eq. Input Noise (dB SPL)	< 25
Attack Time (msec)	6
Release Time (msec)	80
Battery Current Drain (mA)	1.0
Battery Life [10A Zinc Air]	85 hours

The earVenture Promise

